


T25 TR25

Features >>


- Noiseless design DC 24V, 12V tubular motors.
- Flexible control options include RF, switch or network control.
- Stable mechanical limit system.
- External RF control and built in RF receiver are optional.
- Easy to install, easy to operate.
- Φ25 mm diameter, DC motors.

Parameters >>

| Product Name | Rated Voltage | Rated Current | Rated Torque | Rated Speed | Protection Index | Net Weight | Max.limit |
|--------------|---------------|---------------|--------------|-------------|------------------|------------|-----------|
| TR25 | 12VDC | 350mA | 0.8Nm | 25rpm | IP41 | 0.34Kg | 35Tums |
| TR25 | 24VDC | 150mA | 1.1Nm | 21rpm | IP41 | 0.34Kg | 35Tums |
| T25 | 12VDC | 350mA | 0.8Nm | 25rpm | IP41 | 0.32Kg | 35Tums |
| T25 | 24VDC | 150mA | 1.1Nm | 21rpm | IP41 | 0.32Kg | 35Tums |

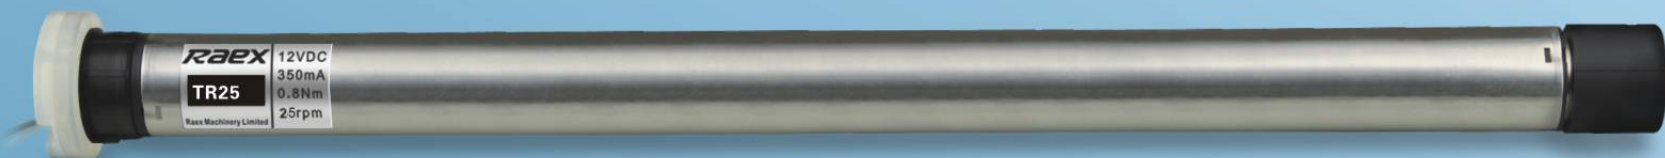

Dimensions >>

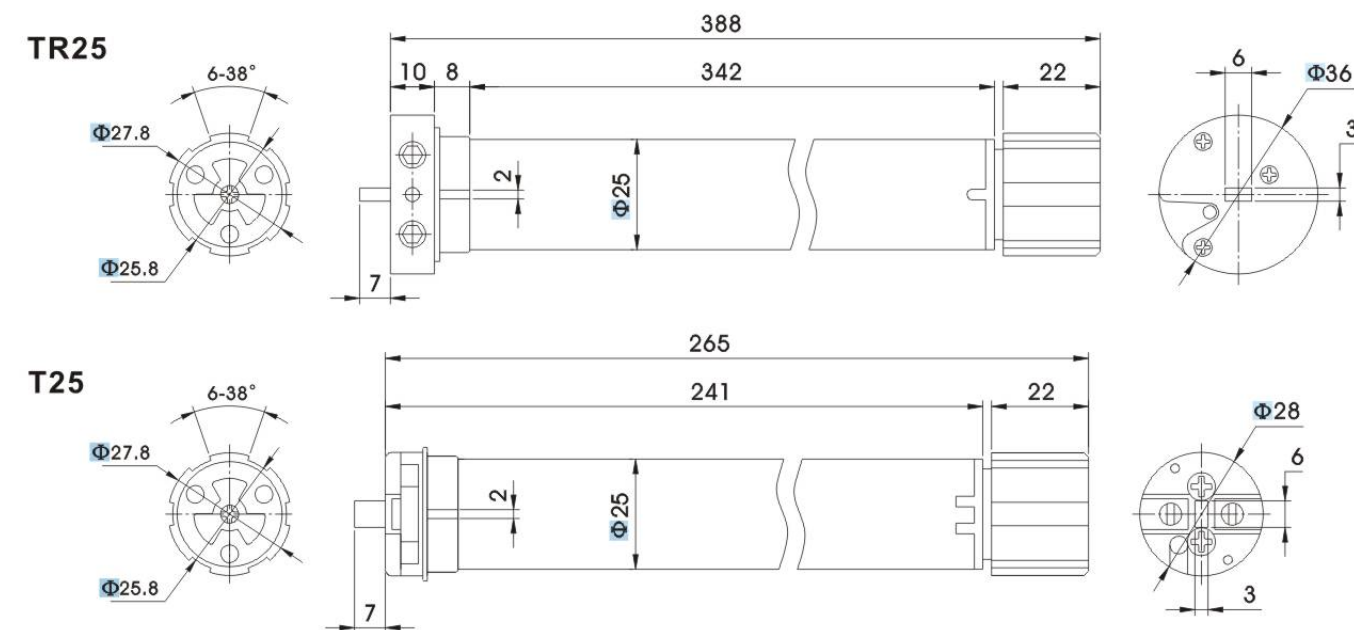

Connection diagram >>

